

PREMIER PUMP & POWER

SPECIFICATION SHEET FOR MODEL 8NNT Trailer Mounted Trash Pump

VACUUM ASSISTED, HEAVY DUTY SOLIDS HANDLING PUMP

PUMP SPECIFICATIONS

Size 8" X 8" AISI 150# flanges

Wear Ring ASTM A48 class 30 cast iron

Volute Casing ASTM A48 class 30 cast iron

Backplate ASTM A48 class 30 cast iron

Mechanical Seal Tungsten vs. Silicon Carbide

seal faces, Viton elastomers, 300 series stainless steel hardware & spring, seal system designed for dry indefinite running

Impeller Enclosed type, two

Enclosed type, two vane, non clog, w/3.38 inch spherical solids handling capability.

Cast Iron

Bearing Housing ASTM A48 class 30 cast iron

Pump-end Bearing Single row ball – 6316-C3

Drive-end Bearing Duplex angular contact ball -

7316-C3

Shaft 1144 Stressproof steel

Lip Seals CR type, single lip

Discharge check valve Swing type, ductile iron

w/Buna-N disc

PRIMING

Priming System Haldex 1300 Series

compressor. Lubricated by engine oil and cooled by engine

water

Separator Spool Standard steel

Air/Water Chamber Chamber designed to separate

air and water before entering

the pump case

Venturi Constructed of non-corrosive

bronze

Optional Priming 50 CFM diaphragm vacuum

pump



ENGINE SPECIFICATIONS

Model John Deere Model 6068HF285

Horsepower 173 intermittent horsepower @

2400 RPM six cylinder, four cycle, water cooled diesel engine, Flexed Tier 3

Governor Electronic

Fuel Consumption 8.33 Gallons Per Hour @ Max

RPM

Safety Shut Down Low Oil Pressure, High

Temperature

Instrument Panel Lofa CP750 auto start panel

Final Tier 4 Option Available

STANDARD TRAILER

Frame Heavy duty, powder coated

fabricated steel frame with lifting

bale

Fuel Tank 180 gallon HDPE fuel cell

Axel Dual 7000# Torsion Flex

Brakes Electric with DOT lighting

package

ENCLOSURE

Material 14 Gauge solid steel outer shell

Finish Powder coated

Sound Barrier 1"- 2" Accounstical foam

insulation


Access Panels Hinged, lockable swinging doors

for easy access to pump and

engine.

Sound Level Unit not to exceed 70 DBA @ 30

PERFORMANCE CURVE

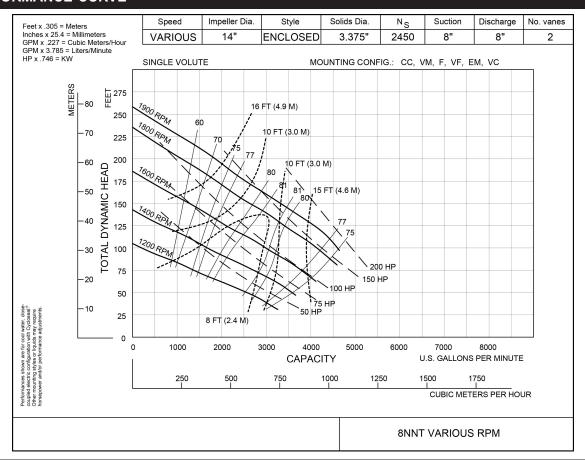

DIMENSIONAL DRAWINGS

7400 NE 47th Ave.