



PREMIER PUMP & POWER
THE WAVE OF THE FUTURE

PREMIER PUMP & POWER

SPECIFICATION SHEET FOR MODEL 12NNT Trailer Mounted Trash Pump

VACUUM ASSISTED, HEAVY DUTY SOLIDS
HANDLING PUMP

PUMP SPECIFICATIONS

Size	12" X 12" AISI 150# flanges
Wear Ring	ASTM A48 class 30 cast iron
Volute Casing	ASTM A536 Grade 65-45-12 ductile iron
Backplate	ASTM A48 class 30 cast iron
Mechanical Seal	Tungsten vs. Silicon Carbide seal faces, Viton elastomers, 300 series stainless steel hardware & spring, seal system designed for dry indefinite running
Impeller	Enclosed type, two port, non clog, w/4 inch spherical solids handling capability. ASTM A48 class 30 cast iron
Bearing Housing	ASTM A48 class 30 cast iron
Pump-end Bearing	Single row ball – 6316-C3
Drive-end Bearing	Duplex angular contact ball – 7316-C3
Shaft	17-4PH corrosion resistant
Lip Seals	CR type, single lip
Discharge check valve	Swing type, ductile iron w/Buna-N disc

PRIMING

Priming System	Haldex 1300 Series compressor. Lubricated by engine oil and cooled by engine water
Separator Spool	Standard steel
Air/Water Chamber	Chamber designed to separate air and water before entering the pump case
Venturi	Constructed of non-corrosive bronze
Optional Priming	50 CFM diaphragm vacuum pump



ENGINE SPECIFICATIONS

Model	Cummins Model QSF6.7 Final Tier 4
Horsepower	225 intermittent horsepower @ 2200 RPM six cylinder, four cycle, water cooled diesel engine
Governor	Electronic
Fuel Consumption	11.1 Gallons Per Hour @ Max RPM
Safety Shut Down	Low Oil Pressure, High Temperature and V-Belt Failure
Instrument Panel	Lofa CP750 auto start panel


STANDARD TRAILER

Frame	Heavy duty, powder coated fabricated steel frame with lifting bale
Fuel Tank	180 gallon HDPE fuel cell
Axle	Dual 7000# Torsion Flex
Brakes	Electric with DOT lighting package

PERFORMANCE CURVE

Feet x .305 = Meters
 Inches x 25.4 = Millimeters
 GPM x .227 = Cubic Meters/Hour
 GPM x 3.785 = Liters/Minute
 HP x .746 = KW





Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	14" @ 0°	ENCLOSED	4.00"	3540	12"	12"	2

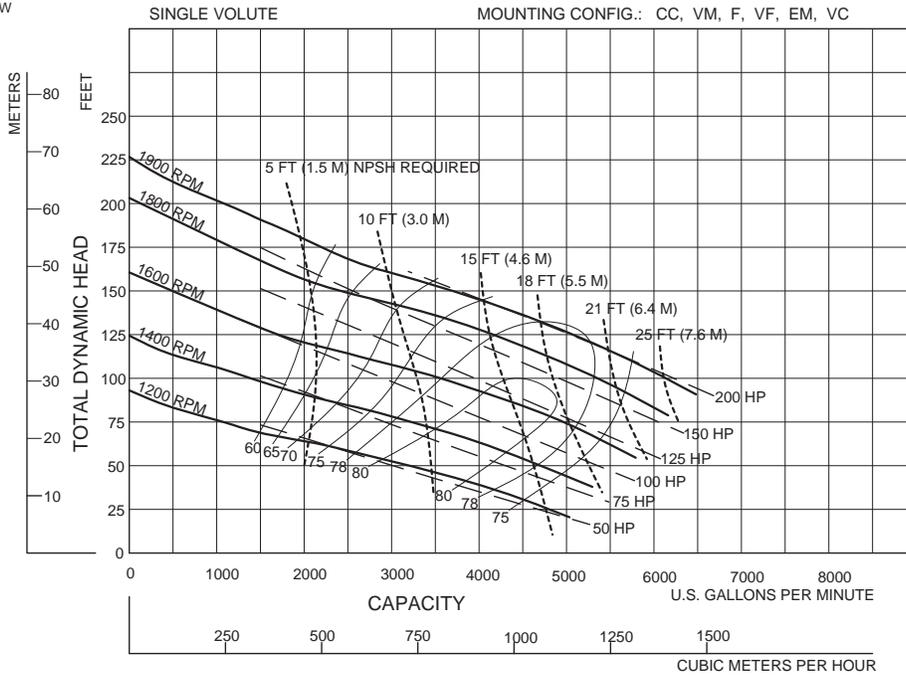

Premier Pump and Power, LLC

12NNT - VARIOUS RPM

DIMENSIONAL DRAWINGS

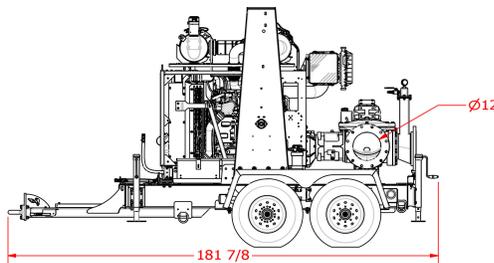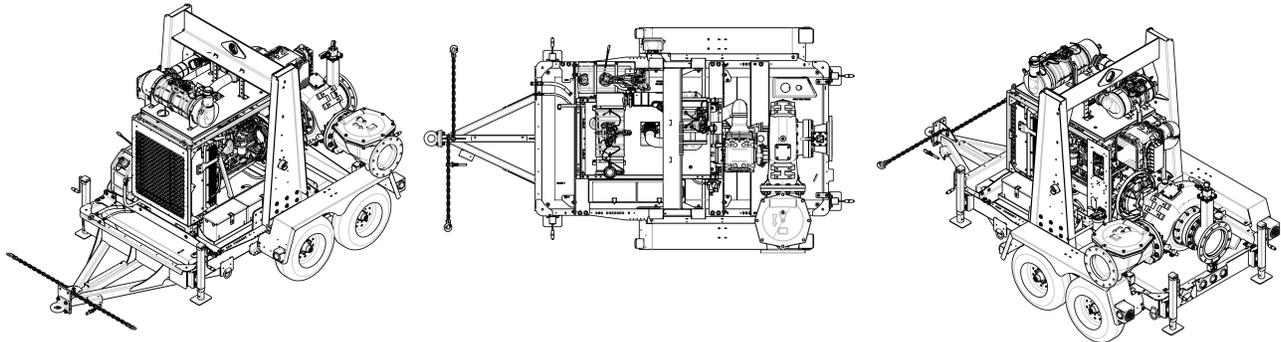

WEIGHT WITH FUEL →